


Normalausführung standard design type standard	mit Abrollautomatik with free-wheeling device avec tambour débrayable	rostfreie Ausführung stainless design version inoxydable	mit Sicherheitsfederkurbel with safety spring crank avec manivelle de sécurité à ressort	mit Variokurbel with Vario-Crank avec manivelle variable
Type 030239016; 030239015; 040239004; 040239006; 040239008 Type 041239004; 041239006; Type 042239008	Type 040239007; 040239009	Type 030239017; 030239013; 040239012; Type 032239017; 042239012; 032239013	Type 030239075; 030239076	Type 040005769; 040003794

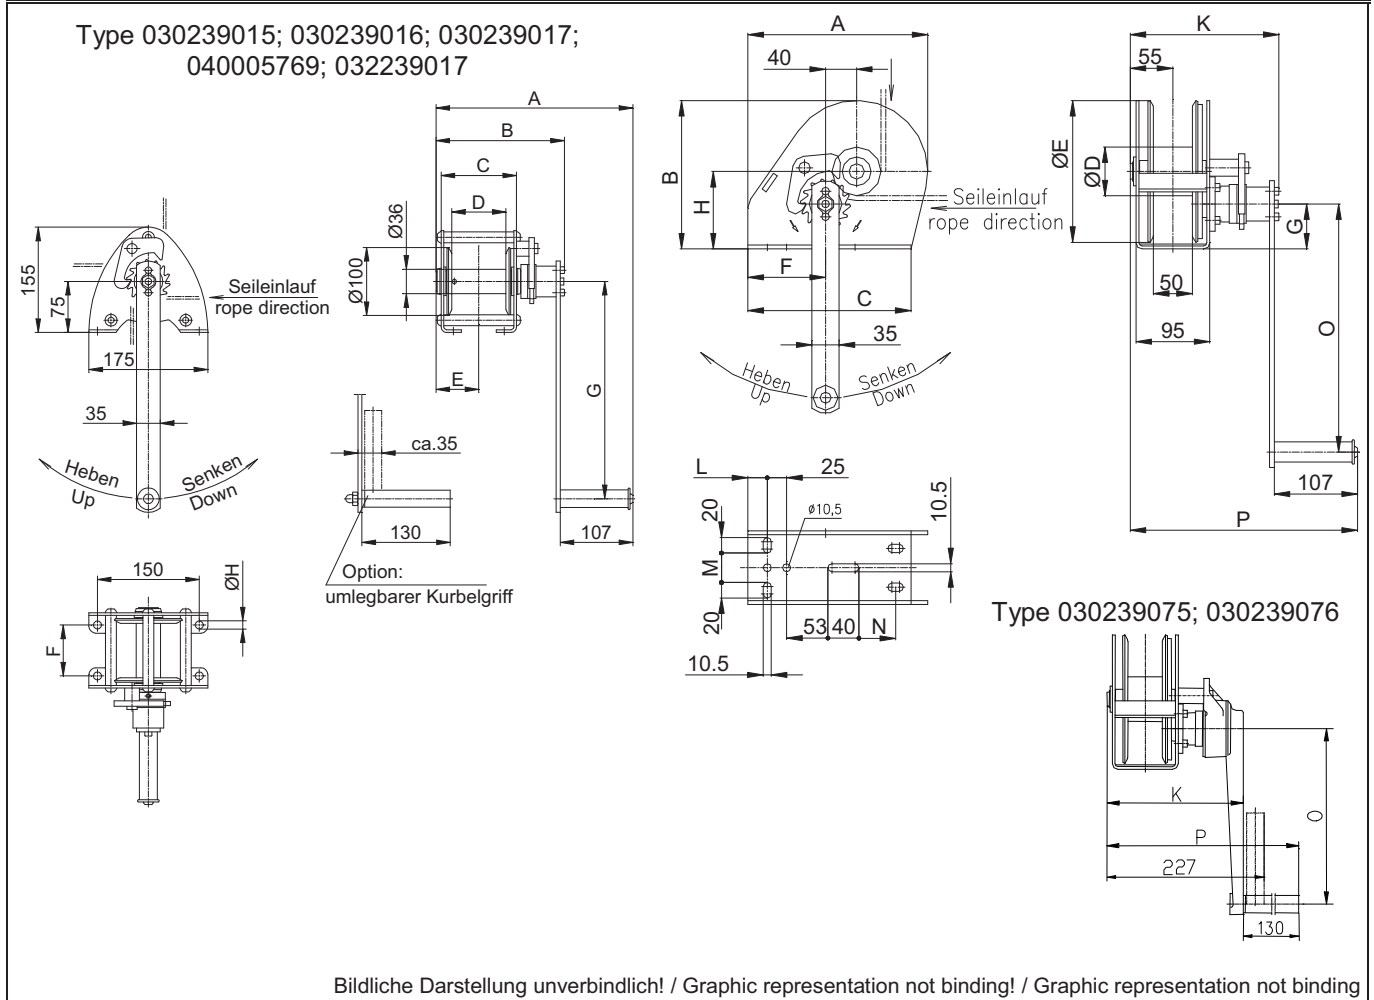

Hublast capacity capacité	Type	030239016	040005769	030239017 032239017	030239015																		
		[kg]	150	150	250	350	040239004	030239012	030239075	040239012	040003794	041239004	042239012	040239006	041239006	040239007	030239013	032239013	030239076	040239008	042239008	040239009	
			150	150	250	350	650	900	900	900	900	1000	1200	1200									
A	[mm]	260	276	292,5	290	A	232	232	232	273	273	273	273	273									
B	[mm]	159	207	191,5	189	B	192	192	192	266	266	266	266	266									
C	[mm]	81	81	111	111	C	210	210	210	240	240	240	240	240									
D	[mm]	50	50	80	80	D	63,5	63,5	63,5	63,5	63,5	63,5	63,5	63,5									
E	[mm]	48	48	65,5	63	E	183	183	183	255	255	255	255	255									
F	[mm]	45	45	75	75	F	100	100	100	78	78	78	78	78									
G	[mm]	200	320	320	320	G	58	58	58	75	75	75	75	75									
Ø H	[mm]	12	12	12	11	H	100	100	100	138	138	138	138	138									
						K	192	192	226	190	197	192	226										
						L	25	25	25	35	35	35	35										
						M	38	38	38	30	30	30	30										
						N	47	47	47	53	53	53	53										
						O	250	320	320	250	250	320	320										
						P	293	393	303	291	327	293	303										