


Dane techniczne / wymiary



Krążki linowe

Nr artykułu	D [mm]	lina ø [mm]	Dm [mm]	Dg [mm]	Grupa nateżenia pracy FEM DIN 15020	maks. siła liny przy przełożeniu		D1 [mm]	R [mm]	B [mm]
						[kg]	[kg]			
033447201	80	3	68	63	3m	700	500	20	1,6	28
033447202	80	4	66	62	1Bm	700	500	20	2,2	28
033447203	90	4	80	76	2m	700	500	20	2,2	28
033447403	90	6	78	72	1Dm	700	500	20	3,2	28
033447204	145	5	125	120	4m	1100	800	25	2,7	34
033447205	145	6	125	119	2m	1100	800	25	3,2	34
033447206	145	7	126	119	1Am	1100	800	25	3,7	34
033447207	185	8	160	152	2m	2300	1630	30	4,2	42
033447208	185	9	162	153	1Am	2300	1630	30	4,8	42
033447209	270	10	245	235	3m	2500	1800	40	5,3	41
033447210	270	11	248	237	3m	2500	1800	40	6,0	41
033447211	270	12	246	234	2m	2500	1800	40	6,5	41
033447212	270	13	244	231	1Am	2500	1800	40	7,0	41
033447217	325	14	297	283	2m	4500	3200	50	7,5	60
033447213	400	16	368	352	3m	5000	3800	50	8,6	61
033447214	400	18	364	346	2m	5000	3800	50	9,7	61
033447215	490	20	450	430	3m	8000	6000	65	10,8	72
033447216	490	22	447	425	2m	8000	6000	65	12	72

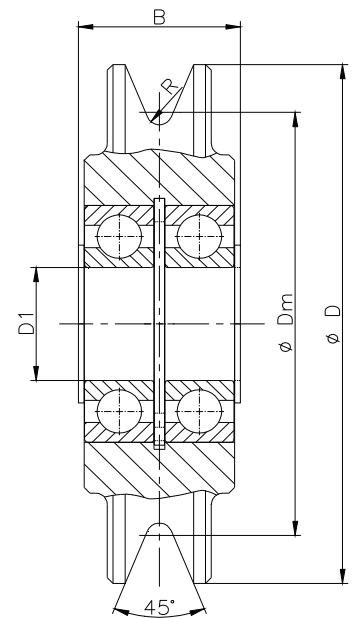

Zblocza linowe

Nr artykułu	D [mm]	Lina ø [mm]	Dm [mm]	Dg [mm]	Grupa nateżenia pracy FEM DIN 15020	maks. siła liny przy przełożeniu		D1 [mm]	L [mm]	C [mm]	H [mm]	B [mm]	E [mm]	S [mm]	K [mm]	M/M1 [mm]
						[kg]	[kg]									
033447101	80	3	68	65	3m	700	500	20	120	90	134	85	62	4	65	9/9
033447102	80	4	66	62	1Bm	700	500	20	120	90	134	85	62	4	65	9/9
033447103	90	4	80	76	2m	700	500	20	120	90	134	85	62	4	65	9/9
033447413	90	6	78	72	1Dm	700	500	20	120	90	134	85	62	4	65	9/9
033447104	145	5	125	120	4m	1100	800	25	200	160	224	125	88	6	110	11,5/13
033447105	145	6	125	119	2m	1100	800	25	200	160	224	125	88	6	110	11,5/13
033447106	145	7	126	119	1Am	1100	800	25	200	160	224	125	88	6	110	11,5/13
033447107	185	8	160	152	2m	2300	1630	30	245	195	273	138	106	8	135	13,5/15
033447108	185	9	162	153	1Am	2300	1630	30	245	195	273	138	106	8	135	13,5/15
033447109	270	10	245	235	3m	2500	1800	40	360	290	407	191	138	10	202	18/20
033447110	270	11	248	237	3m	2500	1800	40	360	290	407	191	138	10	202	18/20
033447111	270	12	246	234	2m	2500	1800	40	360	290	407	191	138	10	202	18/20
033447112	270	13	244	231	1Am	2500	1800	40	360	290	407	191	138	10	202	18/20
033447117	325	14	297	283	2m	4500	3200	50	440	350	490	260	180	12	242	22/25
033447113	400	16	368	352	3m	5000	3800	50	530	430	612	302	212	15	310	26/30
033447114	400	18	364	346	2m	5000	3800	50	530	430	612	302	212	15	310	26/30
033447115	490	20	450	430	3m	8000	6000	65	650	580	694	313	220	16	340	34/40
033447116	490	22	447	425	2m	8000	6000	65	650	580	694	313	220	16	340	34/40

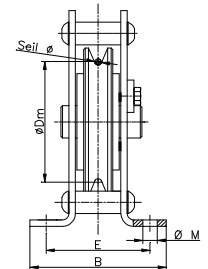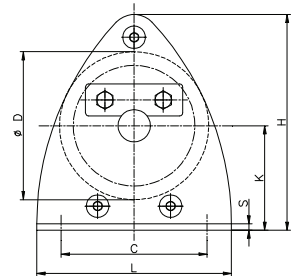

Lokalizacja montażu: zblocza linowe

